






APOLAN®

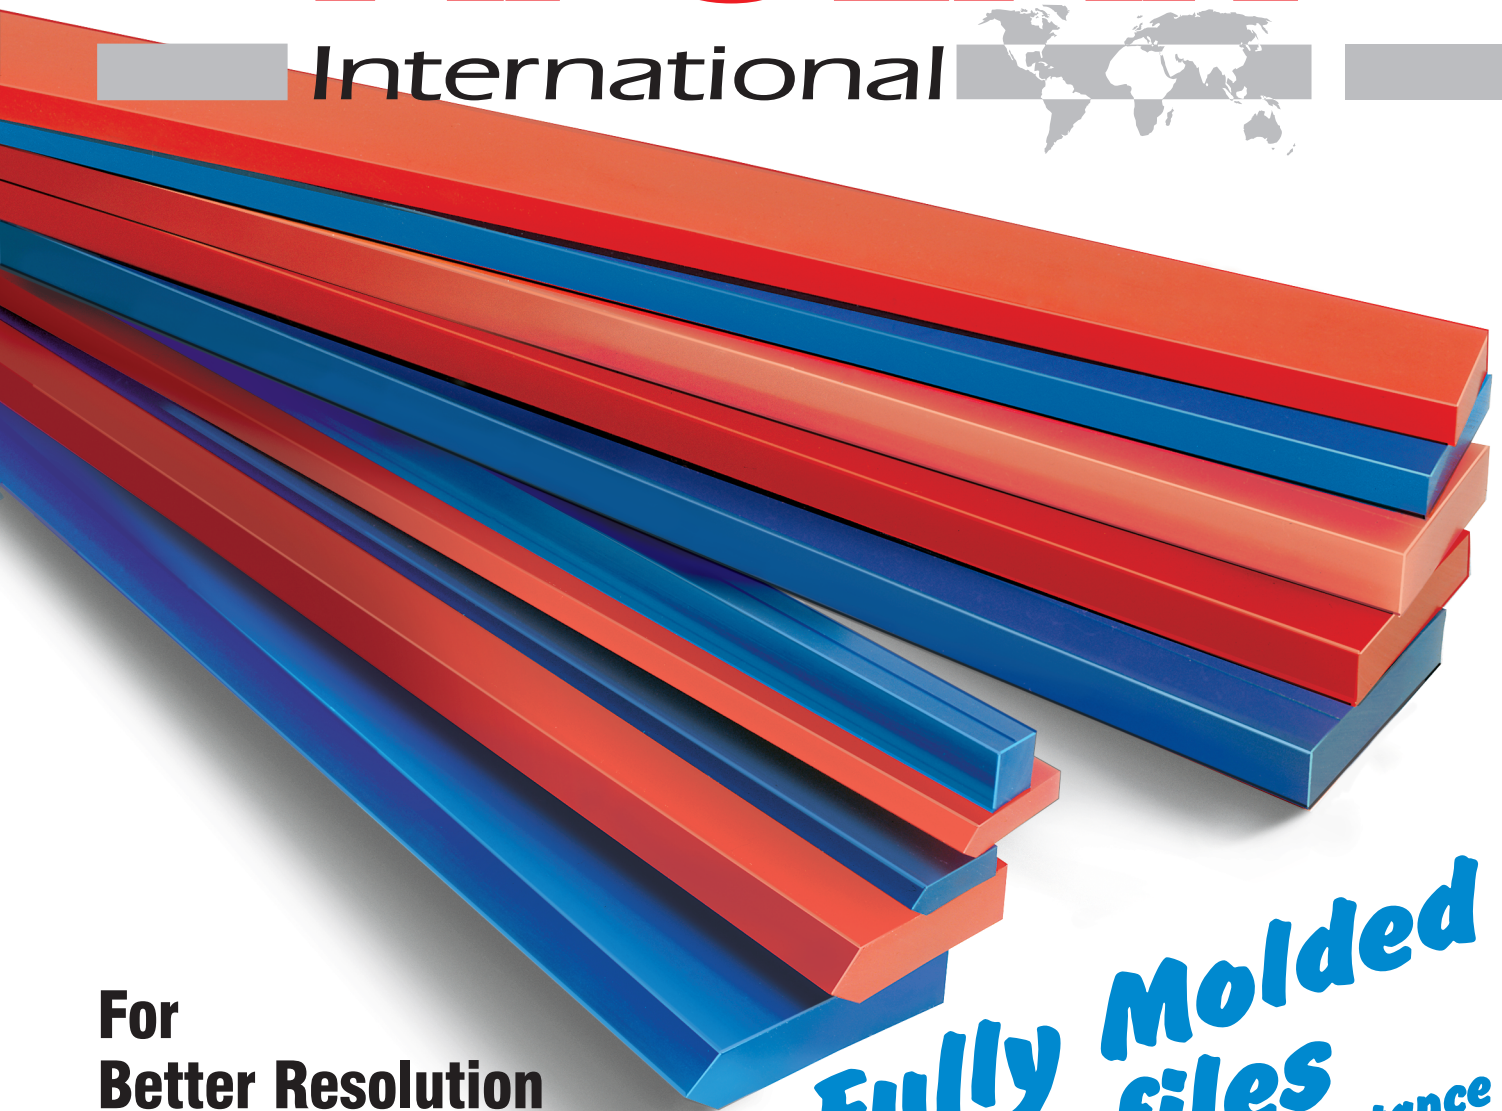


International




**For
Better Resolution
Color Consistency
Longer Production Runs**

**Fully Molded
Profiles**
better solvent resistance
ready to use

Profile	Application	Dimensions	
 R/MR	General Purpose Graphic Screenprint	5 x 19	7 x 45
		5 x 25	8 x 40
		6 x 35	9,5 x 50
 V	Bottle Printing	5 x 19	9,5 x 35
		5 x 25	9,5 x 50
 S/MS	Special and Electronic Printing	9,5 x 9,5	
		4 molded edges ± 0,1 mm	
 BN	Textile Printing	9,5 x 50	7 x 45

	60 – 65 ShA
	70 – 75 ShA
	80 – 85 ShA

Special Squeegees
50 – 95 ShA, 5 mm to 19 mm thick
Double Duro: soft edge/rigid shaft
Composite with fiberglass insert

APOLAN®
International 
"Quality By Design"