

APPLICATION INSTRUCTIONS

EcoPrint



With its soft handle and soft surface, EcoPrint is a great alternative to printable flex films.

FEATURES:



Viscose
flock fibers



450µ



Cotton, polyester,
blended fabrics..
Less suitable for nylon
and other coated textiles.



EcoSolvent,
Solvent



1. Print and cut mirrored

CUTTING CONDITIONS:



Blade
30 - 45°



low/
medium



30 - 40 cm/s



2. Weed design

TRANSFER CONDITIONS:



160 - 170 °C



17 - 15 s



medium/
high



Warm peel



40°C



3. Transfer, remove tape,
done !


Printing profiles at www.seftextile.com

Recommended transfer tape: FlockTape; connected designs can also be transferred without tape.

Drying time: Depending on ink and conditions 1 - 6h

For small designs, it can be useful to first apply the tape over the whole surface and then to weed it from the back.

► PACKAGING

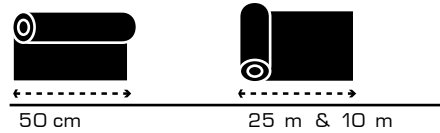

Store in a cool and dry place; protect against the influence of light when stored. We recommend not to exceed a storage period of 36 months. The technical specifications rest on extensive tests and technical research. Due to the variety of possible influences during refinement, and use, the specifications should be viewed as reference values. We recommend a suitability test on the original material. A legally binding warranty of specific characteristics cannot be derived from our specifications.