

## APPLICATION INSTRUCTIONS

### Transfilm 0.3 Printable

Polyester carrier flocked with 0.3mm viscose flock fibres for the production of multicoloured flock transfers. Transfilm is characterised by a uniform, high flock density and a constant flock length. Designs can be transferred without unwanted flock fibres remaining on the textile surface.




1. Print the colour through the flock and dry



2. Print adhesive on the flock surface



3. Apply hot-melt powder on the wet adhesive

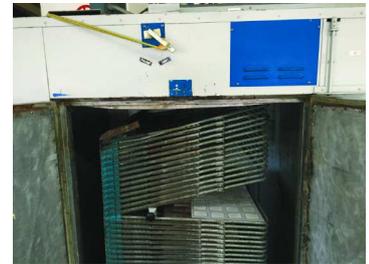

4. Dry the adhesive at below 80 °C



5. Clean off excess hot-melt powder



6. Cure adhesive according to manufacturer's instructions



7. Separate and transfer motifs according to the instructions of the hot-melt manufacturer



8. Peel carrier when cold, done!

Detailed instruction video at: <https://youtu.be/7DbXxEFihXg>


#### ► PACKAGING



51 cm



100 m



50 sheets

51cm x 70cm

Store in a cool and dry place; protect against the influence of light when stored. We recommend not to exceed a storage period of 36 months. The technical specifications rest on extensive tests and technical research. Due to the variety of possible influences during refinement, and use, the specifications should be viewed as reference values. We recommend a suitability test on the original material. A legally binding warranty of specific characteristics cannot be derived from our specifications.