
APPLICATION INSTRUCTIONS

SEF UNLIMITED CREATION

VelCut Evo

OEKO-TEX ® CONFIDENCE IN TEXTILES STANDARD 100 CQ 730/3 & CQ 730/2 IFTH Tested for harmful substances. www.oeko-tex.com/standard100

VelCut is a high-quality heat sealable flock film for plotter-cutting. It has been for years a confirmed best seller. Very easy to cut and weed, it comes in a wide range of colors.

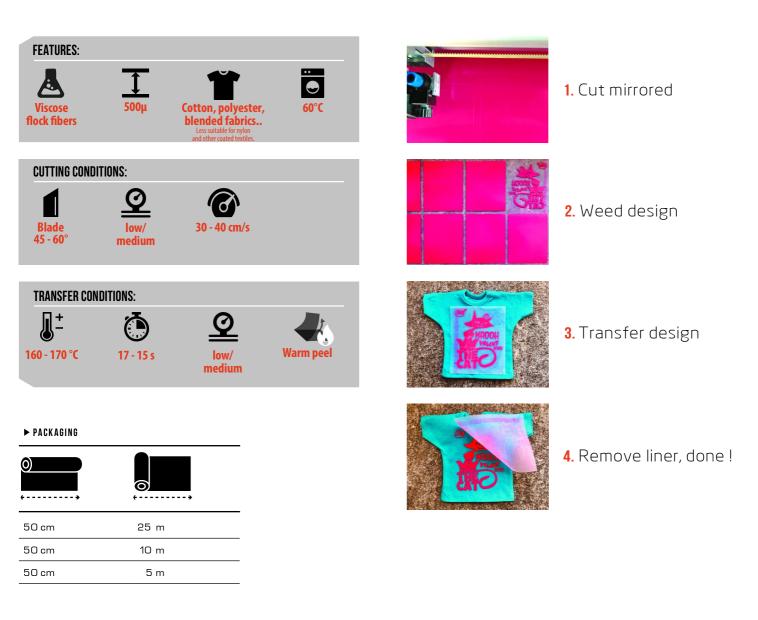

Store in a cool and dry place; protect against the influence of light when stored. We recommend not to exceed a storage period of 36 months. The technical specifications rest on extensive tests and technical research. Due to the variety of possible influences during refinement, and use, the specifications should be viewed as reference values. We recommend a suitability test on the original material. A legally binding warranty of specific characteristics cannot be derived from our specifications.

S E F • 110 BD DENIS-PAPIN 53000 LAVAL – FRANCE TEL. +33 2. 43 53 36 48 FAX +33 2. 43 67 11 78 www.seftextile.com E-mail: contact@sef-france.com SAS. CAPITAL € 945 000 RCS, LAVAL 304.802.291.00027





AVAILABLE COLORS -

VelCut Evo

WHITE 01	LAVANDER 29 P 2635 C	ANIS 35 P 380 C	LIGHT GREY 19 P 422 C
LEMON 02 P 109 C	PURPLE 30 P 259 C	LIME GREEN 23 P 375 C	COOL GREY 11 P COOL GRAY 9 C
SUNNY YELLOW 03 P 137 C	DARK PURPLE 31 P 669 C	LIGHT GREEN 36 P 7738 C	DARK GREY 39 P 432 C
orange 12 P 172 C	MINT 34 P 318 C	GREEN 10 P 341 5 C	ANTHRACITE 19 P 432 C
ELECTRIC RED 04 P 185 C	SKY BLUE 15 P 305 C	KHAKI 37 P 5743 C	BLACK O6 P Hexachrome Black C
RED 05 P 200 C	TURQUOISE 20 P 3125 C	BEIGE 16 P 712 C	
DARK RED 26 P 1797 C	BLUE 32 P 7704 C	BROWN 22 P 478 C	NEON YELLOW P 809 C
BORDEAUX 17 P 7421 C	PACIFIC BLUE 08 P 287 C	CHOCOLATE 14 P 412 C	NEON BRIGHT ORANGE P 804 C
PINK 27 P 708 C	ROYAL BLUE 09 P 281 C		NEON ORANGE P 805 C
MAGENTA 21 P 214 C	NAVY BLUE 07 P 289 C		NEON PINK P 807 C
DARK PINK 28 P 708 C			NEON BLUE P 901 C
			NEON GREEN P 802 C

Store in a cool and dry place; protect against the influence of light when stored. We recommend not to exceed a storage period of 36 months. The technical specifications rest on extensive tests and technical research. Due to the variety of possible influences during refinement, and use, the specifications should be viewed as reference values. We recommend a suitability test on the original material. A legally binding warranty of specific characteristics cannot be derived from our specifications.

S E F • 110 BD DENIS-PAPIN 53000 LAVAL – FRANCE TEL. +33 2. 43 53 36 48 FAX +33 2. 43 67 11 78 www.seftextile.com E-mail: contact@sef-france.com SAS. CAPITAL € 945 000 RCS, LAVAL 304.802.291.00027

