



Precision Screen Printing Meshes

PRODUCT GUIDE



NBC Group Global Network



Contents

NBC Group Global Network	P1
Comparison of technical features Mesh production process	P2
V-SCREEN NEXT	
Polyarylate Monofilament Mesh for High Precision Screen Printing Applications	P3-4
METAL series	
Metallic Wire Mesh for High Precision Screen Printing Applications	P5-6
α series	
Top Quality, Super High Modulus Polyester Monofilament Mesh for Precision Screen Printing Applications	P7-13
AS SCREEN	
Anti-Static Resin Coated Polyester Monofilament Mesh	P14
CATEX	
One-Side Calendered Polyester Monofilament Mesh	P14
β series	
High Modulus Polyester Monofilament Mesh for General Screen Printing Applications	P15
NL SCREEN	
Nylon Monofilament Mesh for Specific Screen Printing Applications	P16
NBC semiautomatic stretching equipment	P17-18



Head Office, Tokyo Japan



Screen Printing Mesh Production Site



Yamanashi Tsuru Factory



Shizuoka Kikugawa Factory



NBC Metalmesh Inc.



PT. NBC Indonesia

Overseas Network



NBC(Shanghai) Mesh Co., Ltd



NBC Meshtec Americas Inc.



NBC Meshtec Inc. Liaison Office Europe

Mesh for Screen Printing

Comparison of technical features

Products	Material	Tensile Strength	Dimensional Stability	Adhesion with Emulsion	Anti-Static Capability	Color Availability	Suitable Applications	
V-SCREEN NEXT	TLCP (Thermotropic Liquid Crystal Polyarylate)	2100N/mm ²	Top Level Long Run Press	Good	N/A	Beige	Solar Cell, MLCC, LTCC, PWB, LCD, TSP & etc.	
Metal series	M-10	SUS 304	1000N/mm ²	Top Level	Good	Effective for Press	Metallic	Solar Cell, PWB, Capacitor, HIC, Bottle, Hotmelt Ink, & etc.
	M-13	SUS 304	1300N/mm ²	Top Level	Good	Effective for Press	Metallic	Solar Cell, Capacitor, HIC, PWB & etc.
	M-30	Super SUS	3000N/mm ²	Top Level	Good	Effective for Press	Metallic	Solar Cell, MLCC, LTCC, HIC & etc.
	W-40	Tungsten	4000N/mm ²	Top Level	Good	Effective for Press	Metallic	Solar Cell, MLCC, LTCC, HIC & etc.
	HDM	SUS 304	1000N/mm ²	Top Level	Good	Effective for Press	Metallic	Thick-Film, Ceramic Decal & etc.
α series (Alpha)	L-Screen	Conjugated High Modulus Polyester	850N/mm ²	Excellent	Excellent	Effective till Degreasing	White Amber Lemon	PWB, Graphic, DVD, Name Plate, Decal, Glass, Bottles, Textile & etc.
	UX Screen	Super High Modulus Polyester	790N/mm ²	Excellent	Excellent	Effective till Degreasing	White Amber Lemon	
	EX Screen	High Modulus Polyester	600N/mm ² or higher	Excellent	Excellent	Effective till Degreasing	White Amber Lemon	
AS Screen	High Modulus Polyester	600N/mm ² or higher	Excellent	Excellent	Effective for Press	White Amber Lemon	Plastic Substrate	
CATEX	L-Screen	Conjugated High Modulus Polyester	850N/mm ²	Good	Good	Effective till Degreasing	White Amber Lemon	Graphic & Clear Coat
	UX Screen	Super High Modulus Polyester	790N/mm ²	Good	Good	Effective till Degreasing	White Amber Lemon	Graphic & Clear Coat
	EX Screen	High Modulus Polyester	600N/mm ² or higher	Good	Good	Effective till Degreasing	White Amber Lemon	Graphic & Clear Coat
β series (Beta)	EX Screen	High Modulus Polyester	600N/mm ² or higher	Good	Good	N/A	White Amber Lemon	Textile, Garments, Glass, Ceramic Tile, & etc.
NL Screen	Nylon (PA 6.6)	450N/mm ² or higher	Unsuitable	Excellent	N/A	White Amber	Bottle, Container & Curved Surface	


Production process for synthetic screen printing mesh



Next Generation TLCP (Thermotropic Liquid Crystal Polymer) Monofilament Mesh for High Precision Screen Printing Applications


Material

TLCP (Thermotropic Liquid Crystal Polymer) Monofilament thread available as fine as 20µm in diameter.

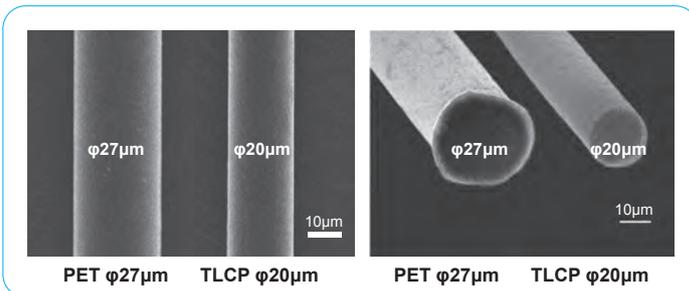

On-Press Benefits

- Excellent dimensional accuracy & longevity
- Improved fine line resolution
- Thinner ink deposit & smoother ink transition

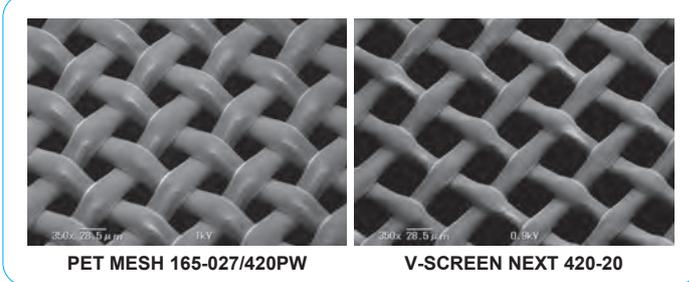

- Super fine threads create larger mesh openings, which reduce mesh interference to the print image and improve ink transition.
- Thinnest commonly available PET threads are φ27µm, compared with V-SCREEN NEXT's φ20µm.
- Smooth mesh surface helps achieve proper emulsion Rz value a key factor contributing to the highest possible resolution.


Outstanding Physical Properties

V-SCREEN NEXT features excellent tensile strength and recovery elasticity, as shown in the diagrams below.

- Benefits:
- High screen tension for dimensional accuracy
 - Minimal screen tension loss and distortion even after long press runs






- Tensile strength test method in accordance with ISO1096-1990
- Sample strip width : 5cm
- Sample strip length : 20cm
- Stretching speed : 10cm/min

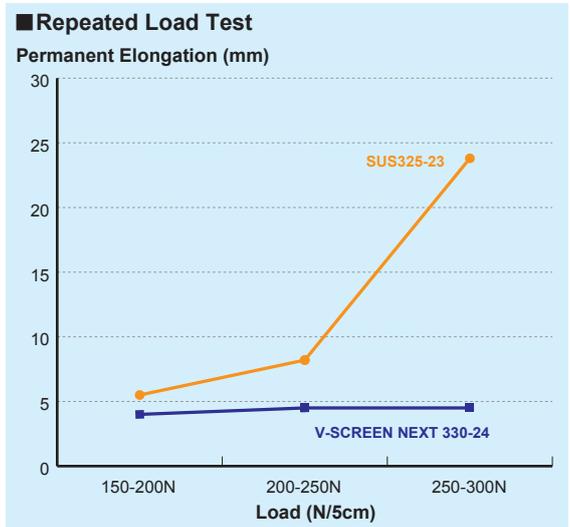

- Repeated load test method: Amount of permanent elongation measured after sample strip run through 50 load/release cycles
- Sample strip width : 5cm
- Sample strip length : 20cm
- Stretching speed : 10cm/min

Superior Dimensional Accuracy Proven by 30,000 Print Test

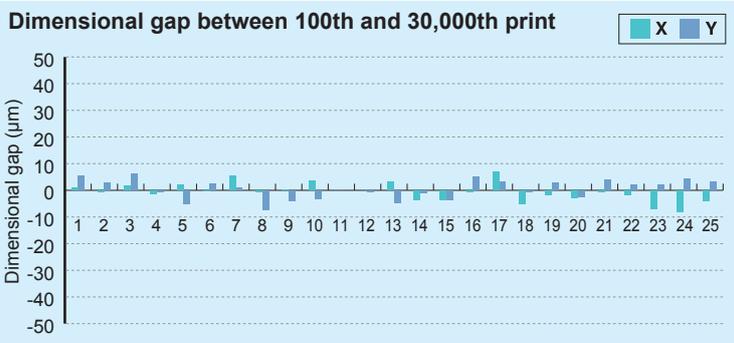


Screen Parameter	
Frame OD	: 320mmx320mm
Frame type	: Aluminum cast frame
Mesh type	: V-SCREEN NEXT 420-20
Screen tension	: 28.4N/cm
Stretching angle	: 23 degrees
EOM	: 10µm


Printing Parameter			
Printer	: LZ-150	Squeegee type	: Micro-Squeegee
Clearance	: 2.0mm	Squeegee shore	: 70 shores
Squeegee press.	: +50kPa	Squeegee angle	: 70 degrees
(kPa/170mm)		Squeegee width	: 170mm
Down stop	: Free	Squeegee speed	: 200mm/sec

High Performance Exposure

V-SCREEN NEXT boasts higher light transparency and lower light reflection than stainless steel wire mesh as shown in the light spectrum analysis below. This enables easier set-up of exposure time for fine screen resolution.

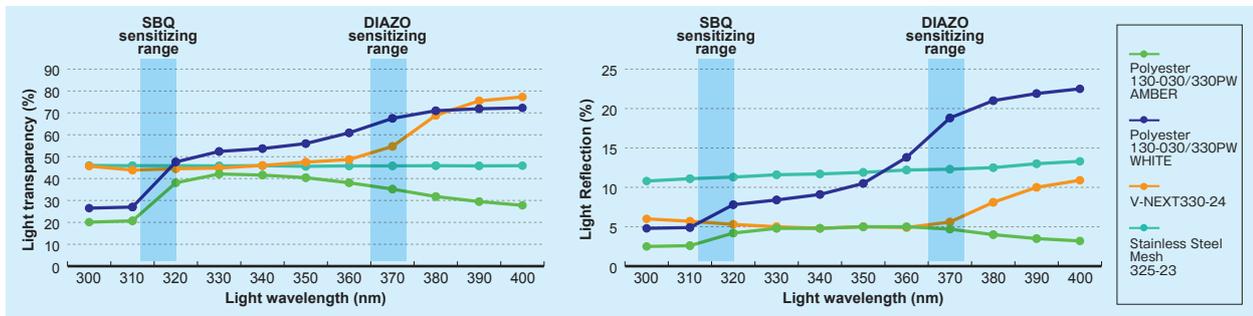

Excellent Resolution for Fine Line Printing

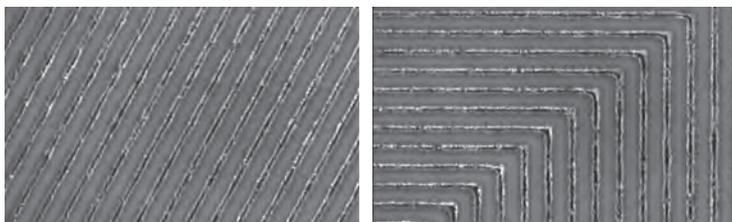

Printing & Screen Parameters	
Print output	: 20µm Line & 40 µm Space
Paste	: Ag paste for LTCC (300Ps · sec)
Mesh type	: V-SCREEN NEXT 420-20
EOM	: 10µm

Specifications

Mesh code	Mesh count		Thread diameter	Mesh thickness	Mesh opening	Mesh open area	Theoretical ink volume	
	/cm	/inch	µm	µm	µm	%	cm ³ /m ²	
V-SCREEN NEXT	420-20	165	420	20	27±3	40	45	12.1
	380-20	150	380	20	27±3	47	49	13.3
	380-24	150	380	24	33±3	43	41	13.6
	330-24	130	330	24	33±3	53	47	15.6

The above specifications may change without notice as a result of product quality improvements. Please ask your sales representative or supplier for availability or more information.

Metal *series*™

Metallic Wire Mesh for High Precision Screen Printing Applications

All of NBC's metal meshes are woven with a special screen printing grade of precision metal wires; giving greater tensile strength, lower elongation and quality consistency to fulfill all technical demands of screen printing applications in the electronics and photovoltaic markets.

We are proud to introduce the 5 ranges of precision metal wire mesh listed below.

M-10 (Standard Stainless Steel Wire Mesh)

M-10 is NBC's standard stainless steel wire mesh produced with rigorous quality control. It is widely used for many sophisticated screen printing applications such as Printed Circuit Board, Membrane Switch, Solar Cells, Ceramic Packages, Capacitors and so forth. The reliable quality and print repeatability are well recognized by those markets.

M-13 (Upgraded Stainless Steel Wire Mesh)

M-13 is upgraded NBC stainless steel wire mesh which is woven with 30% stronger stainless steel wire compared with standard stainless steel wire. The extra tensile strength of M-13 achieves higher screen tension and optimizes printing parameters for further improvement of dimensional accuracy, and prolongs screen service life.

M-30 (Super Stainless Steel Wire Mesh)


M-30 has exceptionally low elongation and large mesh open area. It is woven with super stainless steel wire with 3 times stronger tensile strength than that of standard stainless steel wire. It minimizes mesh interference to print image while ensuring excellent paste transition; making it suitable for challenging applications utilizing high viscosity paste, such as Solar Cell, MLCC, LTCC and so forth.

W-40 (Tungsten Wire Mesh, Next Generation)


W-40 is the next generation of wire meshes woven with tungsten wire which has even greater physical stability and print repeatability than the above super stainless steel wire mesh. Comparison of tensile strength per sq.mm is shown in the chart next page above.

HDM (Heavy Deposit Mesh)

HDM is developed for specific screen-printing applications that require a heavy ink deposit. The magnified photo below shows unique structure of HDM compared with standard wire mesh.

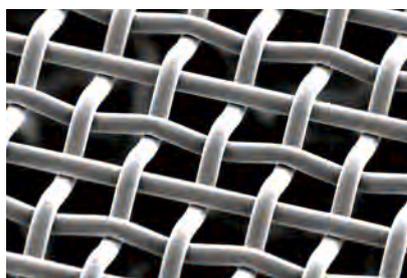


HDM 250-30

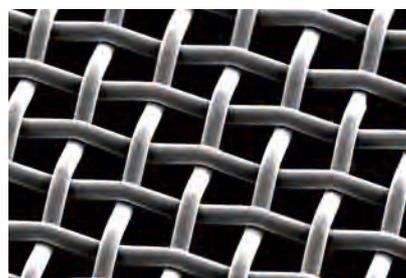

M-10-250-030

■ Comparison of tensile strength per mm²

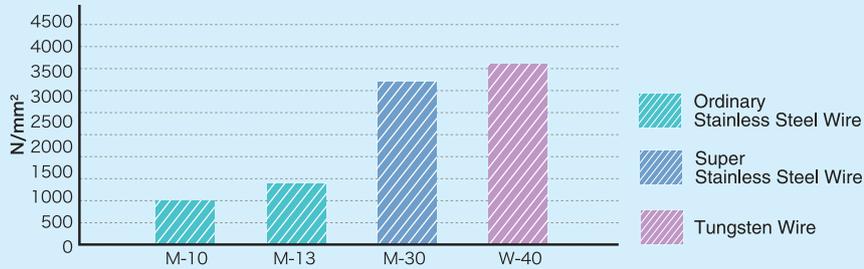

■ M-10

Mesh Code	Mesh Count	Wire Diameter	Mesh Opening	Open Area	Normal		Thickness of Calendered Mesh		
					Theoretical Ink Volume	Thickness	Standard	Heavy	S.Heavy
	/inch	μm	μm	%	cm ³ /m ²	μm	μm	μm	μm
M10 500-019	500	19	32	39	16	41±2	30	25	22
M10 400-019	400	19	45	49	19	39±2	28	25	22
M10 400-023	400	23	41	41	22	55±2	40	35	30
M10 325-028	325	28	50	41	26	64±2	46	42	35
M10 325-030	325	30	48	38	26	68±2	55	50	45
M10 300-030	300	30	55	42	28	68±2	52	46	40
M10 280-035	280	35	56	38	25	65±2			
M10 250-030	250	30	72	50	30	60±2	45	40	35
M10 250-035	250	35	67	43	28	65±2			
M10 230-035	230	35	75	47	31	66±2			
M10 200-040	200	40	87	47	38	80±2	63	56	50
M10 180-050	180	50	91	42	42	100±3			
M10 165-045	165	45	109	50	45	90±2			
M10 150-060	150	60	109	42	50	120±3			
M10 150-065	150	65	104	38	49	130±3			
M10 120-080	120	80	132	39	62	160±3			

■ M-13

Mesh Code	Mesh Count	Wire Diameter	Mesh Opening	Open Area	Normal		Thickness of Calendered Mesh		
					Theoretical Ink Volume	Thickness	Standard	Heavy	S.Heavy
	/inch	μm	μm	%	cm ³ /m ²	μm	μm	μm	μm
M13 730-013	730	13	22	39	11	28±2	21	17	15
M13 640-015	640	15	25	39	14	35±2	25	21	18
M13 500-016	500	16	35	47	17	36±2	25	20	18
M13 500-019	500	19	32	39	16	41±2	30	25	22
M13 400-019	400	19	45	49	19	39±2	28	25	22
M13 400-023	400	23	41	41	22	55±2	40	35	30
M13 325-023	325	23	55	50	25	50±2	38	31	28

■ M-30

Mesh Code	Mesh Count	Wire Diameter	Mesh Opening	Open Area	Normal		Thickness of Calendered Mesh		
					Theoretical Ink Volume	Thickness	Standard	Heavy	S.Heavy
	/inch	μm	μm	%	cm ³ /m ²	μm	μm	μm	μm
M30 480-011	480	11	42	63	16	26±2		17	15
M30 430-013	430	13	46	61	18	29±2		21	17
M30 380-014	380	14	53	62	20	32±2	26	21	18
M30 360-016	360	16	55	60	22	36±2	26	22	20
M30 325-016	325	16	62	63	22	35±2	26	22	20
M30 290-020	290	20	68	60	27	45±2		30	25
M30 250-020	250	20	82	65	29	45±2		30	25

■ W-40

Mesh Code	Mesh Count	Wire Diameter	Mesh Opening	Open Area	Normal		Thickness of Calendered Mesh		
					Theoretical Ink Volume	Thickness	Standard	Heavy	S.Heavy
	/inch	μm	μm	%	cm ³ /m ²	μm	μm	μm	μm
W40 480-011	480	11	42	63	16	26±2		17	15
W40 430-013	430	13	46	61	18	29±2		21	17
W40 380-014	380	14	53	62	20	32±2	26	21	18
W40 325-016	325	16	62	63	23	36±2	25	22	

■ HDM(Heavy Deposit Mesh)

Mesh Code	Mesh Count	Wire Diameter	Mesh Opening	Open Area	Normal	
					Theoretical Ink Volume	Thickness
	/inch	μm	μm	%	cm ³ /m ²	μm
HDM 325-028	325	28	50	41	31	76±2
HDM 250-030	250	30	72	50	40	81±2
HDM 200-040	200	40	87	47	51	108±2

● Most calendered thickness can be customized. Please ask us for the detail. ● The above catalogue values may change without notice.



Top Quality, Super High Modulus Polyester Monofilament Mesh for Precision Screen Printing Applications

Alpha series NEWSUPER treatment

NEWSUPER treatment is a combination of NBC's unique chemical and atmosphere plasma treatment (Corona treatment) which modifies the surface properties as well as the structure at the submicron level, as in the SEM photo below.

Original mesh



NEWSUPER treatment



Alpha series Benefits of NEWSUPER treatment

1. Smoother paste/ink transition




Modified mesh surface in the submicron level reduces the contact area of paste/ink particles, improves paste/ink transition through the mesh and optimizes print resolution, making it ideal for halftone and fine line printing.

20% tone at 150Lpi




10% tone at 150Lpi

5% tone at 100Lpi

Alpha series (L-150-027/380PW)





Conventional Mesh (L-150-027/380PW)



2. Extended screen service life

Modified mesh surface with NEWSUPER treatment holds emulsion/capillary film tight and it prolongs screen service life particularly on long run prints or printing with abrasive paste. The adhesion property of mesh is proven below by a comparison test with self-adhesive tape.

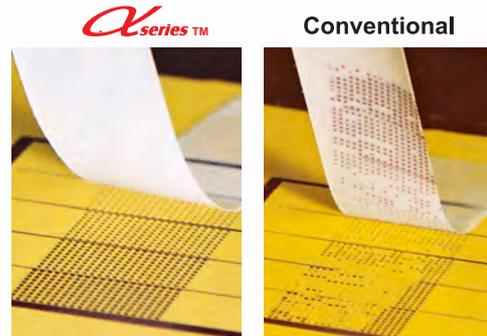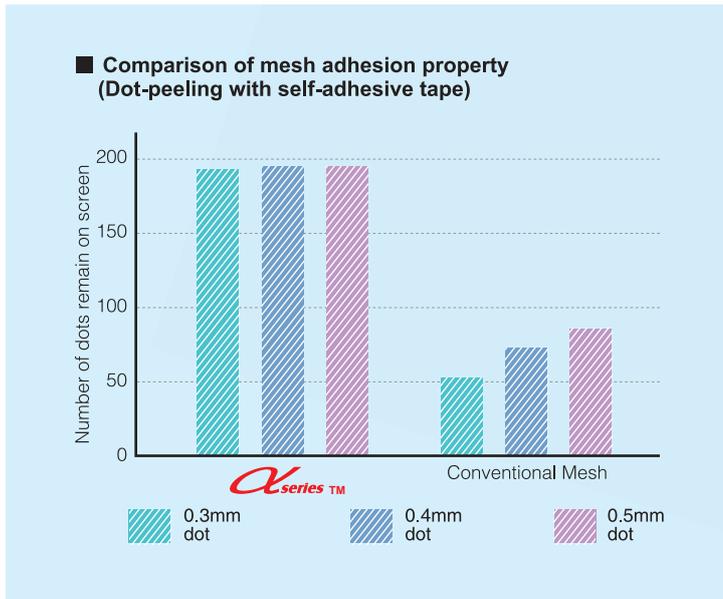

Test Parameter


Mesh type: L-Screen 150-030/380PW
Emulsion: Dual-Cure
EOM: 10 μm
Dot size: 0.3mm, 0.4mm and 0.5mm square dot
Number of dots: 200 each
The above dots are peeled-off by self-adhesive tape.
The number of dots remaining on the mesh are counted.

3. Extended exposure latitude

NEWSUPER treatment not only offers improved adhesion of emulsion/capillary films; it also extends the limit of exposure latitude (underexposure). This is particularly effective for fine detail and use with CTS systems. The below diagram shows the comparison of exposure latitude of three different types of mesh.


Screen Parameter

Mesh: UX 110-035/280PW
Mesh Thickness: 50μm
Emulsion: Dual-Cure
EOM: 12μm
Exposure Unit: Metal halide 3KW with Fresnel lens
Illuminance: 7.0mW/cm ²
Distance to screen: 90cm distance from light bulb

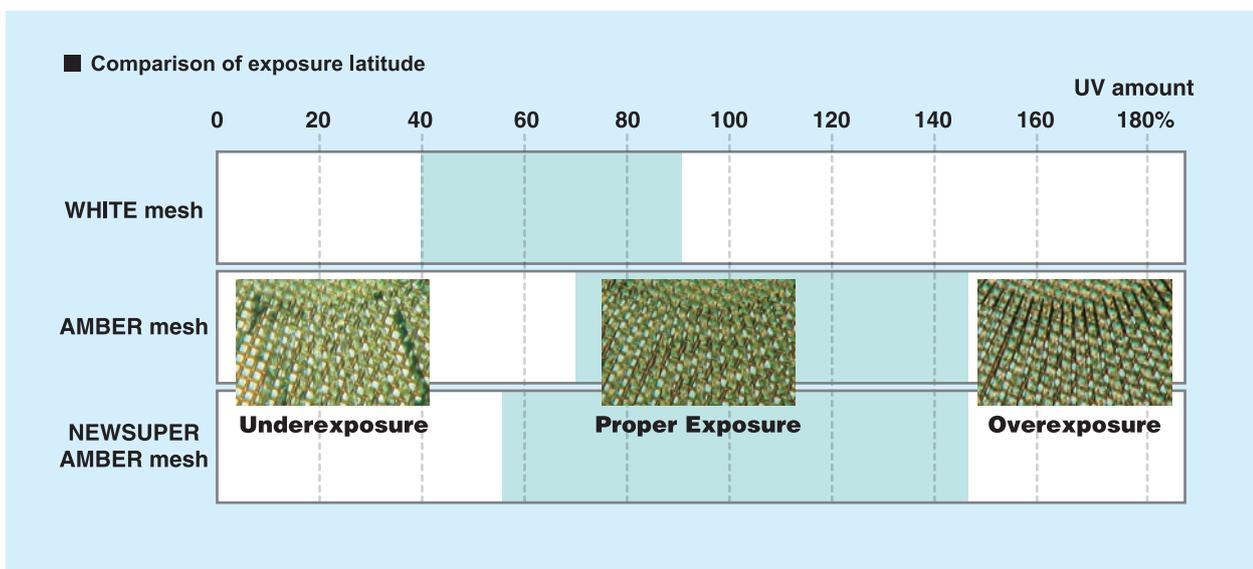

1. Minimized screen tension loss


α series of NBC high modulus polyester mesh is further improved by an optimized heat-setting process and rigorous quality control system to minimize screen tension loss after stretching and printing process. The below diagram shows the comparison data in tension loss between α series and original mesh.

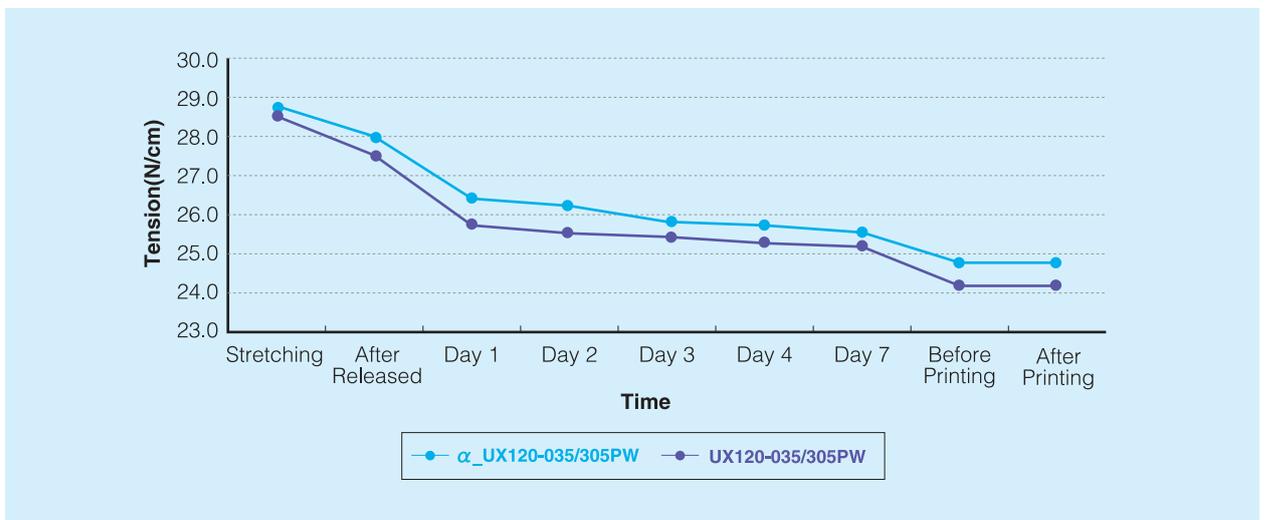

2. Further improved dimensional accuracy



The diagrams show the comparison data of dimensional gap between the screen image (300mm ×300mm) and printing result, proving that the dimensional accuracy of α UX120-035/305PW is significantly improved and more consistent for long run printing.

Dimensional gap change from 100th print to 3000th print



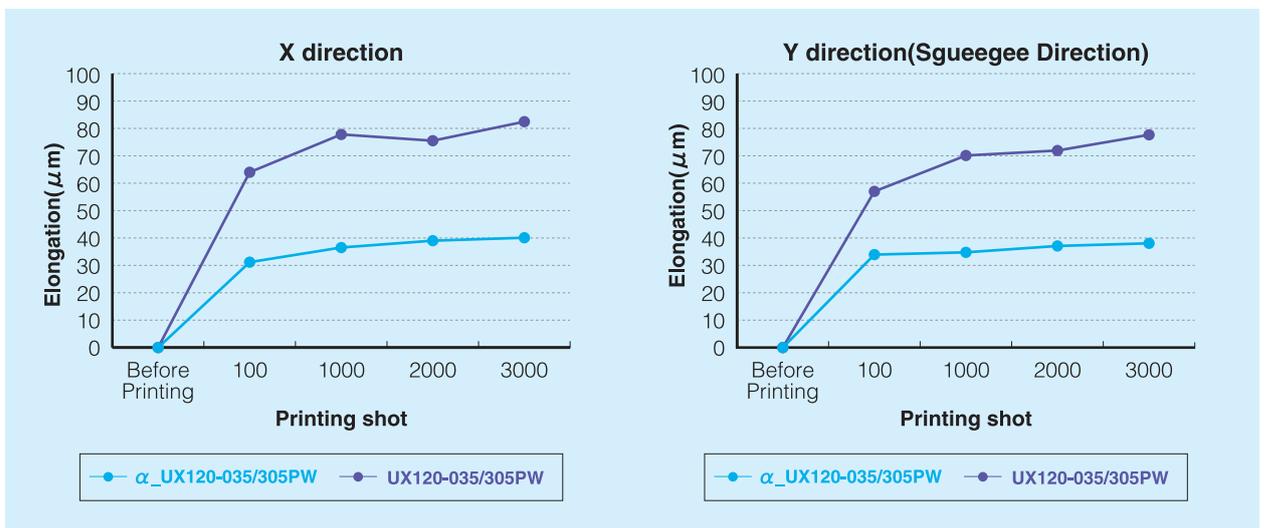


Dimensional gap between screen image and 3000th print

α series™ UX120-035/305PW

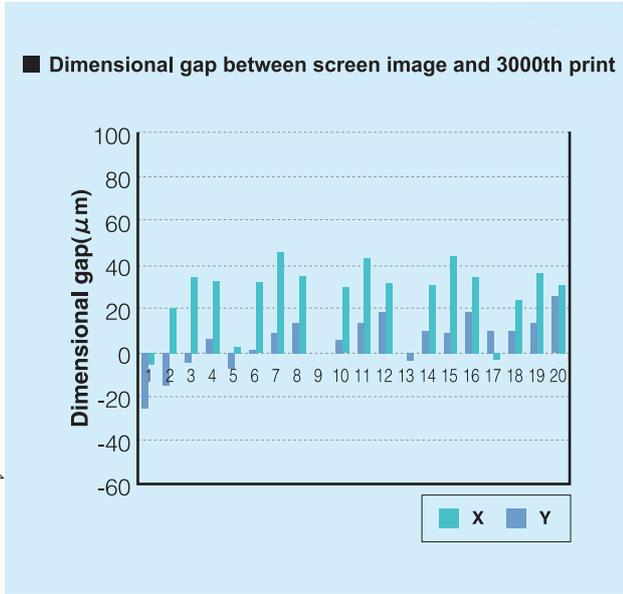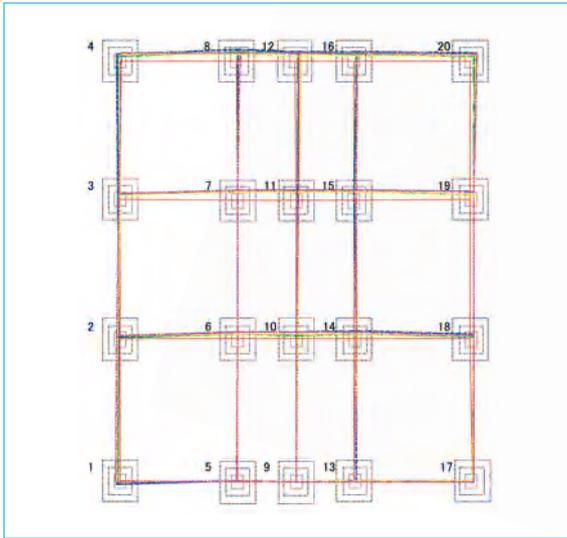

Original UX120-035/305PW

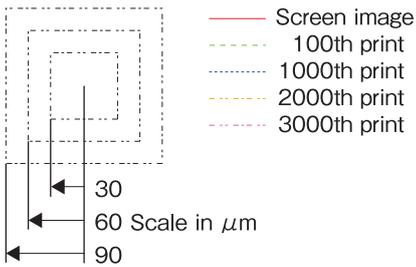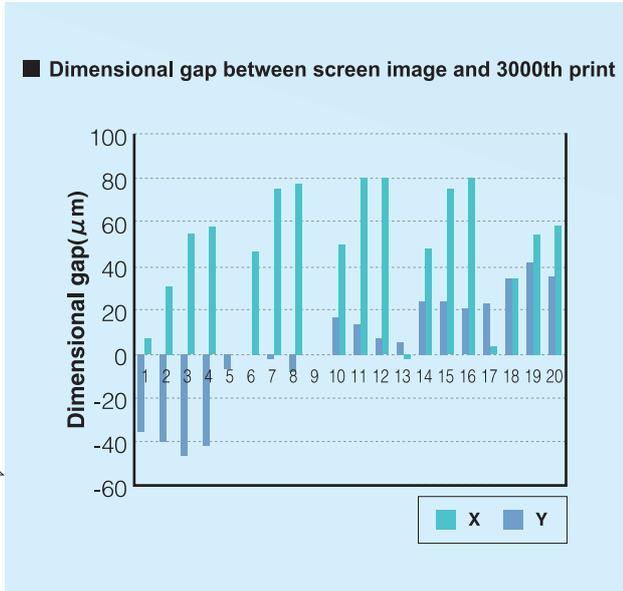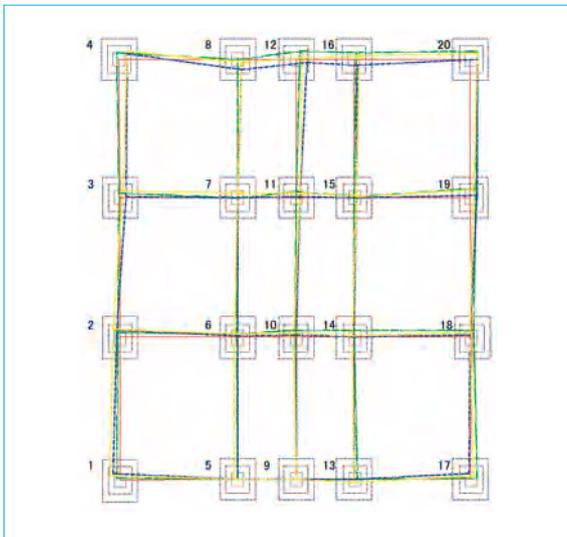

Printing Parameter
Printer: Flat Bed(Micro Tech MT1000 TVC)
Clearance: 3.8mm
Squeegee Pressure: 42N per 380mm
Type of Squeegee: Micro-Squeegee
Squeegee Shore: 70 shores
Squeegee Angle: 70 degrees
Squeegee Length: 380mm
Squeegee Speed: 150mm/sec

Screen Parameter
Frame Size: 860mm × 860mm
Frame Type: Aluminum Tubular Frame
Mesh Type: UX120-035/305PW
Tension: 24.2 N/cm before press
Stretching Angle: 15 degrees
EOM: 10 μm



Top Quality, Super High Modulus Polyester Monofilament Mesh for Precision Screen Printing Applications

* Excluding EX SCREEN

Thread type

L: Conjugated Polyester Monofilament (27µmφ - 30 µmφ)

UX: Super High Modulus Polyester Monofilament (33µmφ - 45 µmφ)

EX: High Modulus Polyester Monofilament

Mesh Code	Mesh Count		Weaving	Thread Diameter	Mesh Thickness			Mesh Opening	Open Area	Theoretical Ink Volume	
	Tolerance ±3%				115cm 136cm 155cm	165cm & wider	115cm 136cm 155cm			165cm & wider	
	/cm	/inch			µm						µm
α_L- 200 -024/ 508 PW	200	508	1:1 PW	24	36±2µm	N/A	24	23	8.3	N/A	
α_L- 200 -027/ 508 TW	200	508	2:2 TW	27	50±3µm	N/A	22	19	9.7	N/A	
α_L- 180 -027/ 460 PW	180	460	1:1 PW	27	41±2µm	42±3µm	24	19	7.7	7.9	
α_L- 180 -030/ 460 TW	180	460	2:2 TW	30	55±3µm	56±4µm	23	17	9.5	N/A	
α_L- 165 -027/ 420 PW	165	420	1:1 PW	27	40±2µm	41±3µm	30	25	9.8	10.1	
α_L- 165 -030/ 420 PW	165	420	1:1 PW	30	45±2µm	46±3µm	25	18	8.0	8.2	
α_UX 165 -033/ 420 TW	165	420	2:2 TW	33	60±3µm	60±3µm	24	16	9.4	9.4	
α_L- 150 -027/ 380 PW	150	380	1:1 PW	27	40±2µm	41±3µm	38	32	12.9	13.3	
α_L- 150 -030/ 380 PW	150	380	1:1 PW	30	45±2µm	46±3µm	33	24	11.0	11.2	
α_UX 150 -033/ 380 PW	150	380	1:1 PW	33	48±2µm	49±3µm	27	16	7.8	8.0	
α_UX 150 -035/ 380 TW	150	380	2:2 TW	35	64±3µm	64±3µm	30	20	12.9	12.9	
α_L- 140 -027/ 355 PW	140	355	1:1 PW	27	40±2µm	41±3µm	44	38	15.1	15.5	
α_L- 140 -030/ 355 PW	140	355	1:1 PW	30	45±2µm	46±3µm	39	30	13.4	13.7	
α_UX 140 -035/ 355 PW	140	355	1:1 PW	35	53±2µm	54±3µm	32	19	10.3	10.5	
α_UX 140 -035/ 355 TW	140	355	2:1 TW	35	61±3µm	61±3µm	34	23	13.8	13.8	
α_L- 130 -027/ 330 PW	131	334	1:1 PW	27	40±2µm	41±3µm	49	42	16.6	17.0	
α_L- 130 -030/ 330 PW	131	334	1:1 PW	30	45±2µm	46±3µm	44	33	15.1	15.4	
α_UX 130 -035/ 330 PW	130	330	1:1 PW	35	53±2µm	54±3µm	38	24	12.9	13.2	
α_L- 124 -027/ 315 PW	124	315	1:1 PW	27	40±2µm	41±3µm	54	45	17.9	18.4	
α_L- 124 -030/ 315 PW	124	315	1:1 PW	30	45±2µm	46±3µm	49	37	16.6	17.0	
α_L- 120 -030/ 305 PW	120	305	1:1 PW	30	46±2µm	46±3µm	53	41	18.6	18.6	
α_UX 120 -033/ 305 PW	120	305	1:1 PW	33	50±2µm	51±3µm	47	32	15.9	16.2	
α_UX 120 -035/ 305 PW	120	305	1:1 PW	35	53±2µm	54±3µm	45	29	15.5	15.8	
α_UX 120 -040/ 305 PW	118	300	1:1 PW	40	62±2µm	63±3µm	37	19	11.8	12.0	
α_UX 110 -035/ 280 PW	110	280	1:1 PW	35	53±2µm	54±3µm	53	34	18.1	18.4	
α_UX 106 -040/ 270 PW	106	270	1:1 PW	40	60±2µm	61±3µm	49	27	16.3	16.6	
α_UX 100 -035/ 255 PW	100	255	1:1 PW	35	53±2µm	54±3µm	64	41	21.9	22.3	
α_UX 100 -040/ 255 PW	100	255	1:1 PW	40	60±2µm	61±3µm	56	32	19.0	19.3	
EX* 100 -048/ 255 PW	100	255	1:1 PW	48	76±2µm	76±3µm	45	20	15.5	15.5	
α_UX 90 -040/ 230 PW	90	230	1:1 PW	40	60±2µm	61±3µm	67	37	22.1	22.5	
α_UX 90 -045/ 230 PW	90	230	1:1 PW	45	68±2µm	69±3µm	60	30	20.1	20.4	
EX* 90 -048/ 230 PW	88	225	1:1 PW	48	75±2µm	79±4µm	58	26	19.8	20.9	
EX* 90 -055/ 230 TW	88	225	2:1 TW	55	91±4µm	95±5µm	54	23	20.8	21.7	
EX* 90 -071/ 230 TW	88	225	3:1 TW	71	139±10µm	N/A	38	11	15.7	N/A	
α_UX 90 -33x2 230 PW	90	230	1:1 PW	33	57±3µm	60±4µm	40	13	7.5	7.9	
α_UX 79 -045/ 200 PW	79	200	1:1 PW	45	68±2µm	69±3µm	81	41	27.7	28.1	
EX* 79 -048/ 200 PW	79	200	1:1 PW	48	75±2µm	79±4µm	75	35	26.2	27.6	
EX* 79 -055/ 200 PW	79	200	1:1 PW	55	88±4µm	88±4µm	69	30	26.0	26.0	

The above specifications may be changed for quality improvement without notice.

*α_EX SCREEN upgrade is also possible upon request.

Please ask your sales rep or supplier for availability and more information.

Mesh Code	Mesh Count		Weaving	Thread Diameter	Mesh Thickness			Mesh Opening	Open Area	Theoretical Ink Volume	
	Tolerance ±3%				115cm 136cm 155cm	165cm & wider	115cm 136cm 155cm			165cm & wider	
	/cm	/inch			µm	µm	µm			µm	%
α_UX 71 -045/ 180 PW	71	180	1:1 PW	45	70±2µm	72±3µm	95	45	31.7	32.6	
EX* 71 -048/ 180 PW	71	180	1:1 PW	48	76±2µm	80±4µm	91	42	31.6	33.3	
EX* 71 -055/ 180 PW	71	180	1:1 PW	55	88±4µm	88±4µm	85	36	31.9	31.9	
EX* 71 -063/ 180 PW	71	180	1:1 PW	63	98±5µm	N/A	71	25	24.8	N/A	
EX* 63 -048/ 160 PW	63	160	1:1 PW	48	80±4µm	80±4µm	110	48	38.4	38.4	
EX* 63 -063/ 160 PW	63	160	1:1 PW	63	105±5µm	105±5µm	93	34	36.0	36.0	
EX* 63 -071/ 160 PW	63	160	1:1 PW	71	116±6µm	116±6µm	79	25	28.7	28.7	
α_UX 59 -045/ 150 PW	59	150	1:1 PW	45	72±2µm	74±4µm	124	54	38.6	39.7	
EX* 59 -048/ 150 PW	59	150	1:1 PW	48	76±2µm	80±4µm	120	50	38.2	40.2	
EX* 59 -055/ 150 PW	59	150	1:1 PW	55	88±4µm	88±4µm	114	45	39.9	39.9	
EX* 59 -063/ 150 PW	59	150	1:1 PW	63	105±5µm	105±5µm	104	38	39.9	39.9	
EX* 59 -071/ 150 PW	59	150	1:1 PW	71	116±6µm	116±6µm	91	29	33.5	33.5	
EX* 55 -063/ 140 PW	55	140	1:1 PW	63	105±5µm	105±5µm	116	41	43.2	43.2	
EX* 55 -080/ 140 PW	55	140	1:1 PW	80	140±7µm	140±7µm	97	29	40.0	40.0	
α_UX 53 -045/ 135 PW	53	135	1:1 PW	45	73±4µm	74±4µm	143	58	42.2	42.7	
EX* 53 -048/ 135 PW	53	135	1:1 PW	48	79±4µm	79±4µm	139	55	43.1	43.1	
EX* 53 -055/ 135 PW	53	135	1:1 PW	55	95±5µm	95±5µm	133	50	47.5	47.5	
EX* 49 -071/ 125 PW	49	125	1:1 PW	71	116±6µm	116±6µm	130	41	47.6	47.6	
α_UX 47 -045/ 120 PW	47	120	1:1 PW	45	73±4µm	74±4µm	167	62	45.4	46.1	
EX* 47 -048/ 120 PW	47	120	1:1 PW	48	80±4µm	80±4µm	163	59	47.4	47.4	
EX* 47 -055/ 120 PW	47	120	1:1 PW	55	95±5µm	95±5µm	157	55	52.3	52.3	
EX* 47 -063/ 120 PW	47	120	1:1 PW	63	105±5µm	105±5µm	149	50	52.0	52.0	
EX* 47 -080/ 120 PW	47	120	1:1 PW	80	137±7µm	137±7µm	130	38	51.4	51.4	
EX* 43 -080/ 110 PW	43	110	1:1 PW	80	132±7µm	132±7µm	150	42	55.7	55.7	
EX* 39 -055/ 100 PW	39	100	1:1 PW	55	95±5µm	95±5µm	199	61	58.3	58.3	
EX* 39 -071/ 100 PW	39	100	1:1 PW	71	122±6µm	122±6µm	182	51	62.6	62.6	
EX* 39 -080/ 100 PW	39	100	1:1 PW	80	134±7µm	134±7µm	174	47	62.9	62.9	
EX* 35 -071/ 90 PW	35	90	1:1 PW	71	125±6µm	125±6µm	210	55	69.2	69.2	
EX* 35 -080/ 90 PW	35	90	1:1 PW	80	137±7µm	137±7µm	202	51	70.2	70.2	
EX* 31 -055/ 80 PW	31	80	1:1 PW	55	95±5µm	95±5µm	263	69	65.2	65.2	
EX* 31 -071/ 80 PW	31	80	1:1 PW	71	125±6µm	125±6µm	246	60	75.0	75.0	
EX* 31 -100/ 80 PW	31	80	1:1 PW	100	170±9µm	170±9µm	218	47	80.1	80.1	
EX* 27 -055/ 70 PW	27	70	1:1 PW	55	95±5µm	95±5µm	308	72	68.4	68.4	
EX* 27 -071/ 70 PW	27	70	1:1 PW	71	125±6µm	125±6µm	291	64	80.4	80.4	
EX* 27 -125/ 70 PW	27	70	1:1 PW	125	240±24µm	240±24µm	238	43	103.3	103.3	
EX* 24 -120/ 60 PW	24	60	1:1 PW	120	210±21µm	210±21µm	303	51	107.8	107.8	
EX* 24 -145/ 60 PW	24	60	1:1 PW	145	260±26µm	N/A	278	43	112.0	N/A	
EX* 20 -200/ 50 PW	20	50	1:1 PW	200	370±37µm	N/A	308	37	136.0	N/A	
EX* 16 -200/ 40 PW	16	40	1:1 PW	200	370±37µm	N/A	435	47	173.6	N/A	
EX* 12 -150/ 30 PW	12	30	1:1 PW	150	290±29µm	N/A	696	68	196.0	N/A	
EX* 12 -250/ 30 PW	12	30	1:1 PW	250	480±48µm	N/A	597	50	238.7	N/A	
EX* 10 -300/ 25 PW	10	25	1:1 PW	300	600±60µm	N/A	716	50	173.9	N/A	

The above specifications may be changed for quality improvement without notice.
 *α_EX SCREEN upgrade is also possible upon request.
 Please ask your sales rep or supplier for availability and more information.

Highest stretching tension of *α* series™

Highest stretching tension value of NBC *α* series polyester monofilament meshes.

40N/cm		30μm		35μm	35μm	35μm		40μm	40μm	40μm	45μm	55μm	55μm	63μm	63μm	63μm		71μm	63μm	80μm		80μm	100μm	
			33μm	33μm				35μm	35μm		40μm	48μm												
			30μm									45μm										71μm	71μm	71μm
35N/cm				30μm	30μm			33μm	33μm	33μm			45μm		55μm									
						33μm									48μm								71μm	
30N/cm	27μm					30μm		30μm									55μm							
		27μm	27μm	27μm					30μm										55μm					
							27μm												48μm					
25N/cm					27μm																		55μm	
	24μm					27μm																		
20N/cm																								
mesh/cm	200	180	165	150	140	130	124	120	110	100	90	79	71	63	59	55	53	49	47	43	39	35	31	27
mesh/inch	508	460	420	380	355	330	315	305	280	255	230	200	180	160	150	140	135	125	120	110	100	90	80	70

Remark: The above screen tension values are calculated from breaking tension in 1000mmx1000mm sized mechanical stretching devices and they are measured by NBC tension meter. NBC takes no responsibility for accidental damage to the mesh or improper stretching operation.

Top quality guaranteed

Every roll of NBC polyester mesh is supplied with an inspection tag. While flaws are kept to a minimum by careful quality control, any flaw found under our thorough inspection is clearly marked to prevent it being stretched into your image area. Thickness and mesh count are precisely controlled and documented on the tag -- critical information for setting your production standards. You will keep your presses running and save time spent troubleshooting.

NBC also compensates for flaws by adding one half meter of mesh to the end of the roll free of charge for each flaw...now that's value.


品名 Item	α_L- SCREEN 140-030/355PW			品名 Item			
巾 Width	155CM / 61"			製造番号 Roll No.	E1206A00110-03		
原料 Material	POLYESTER 100%			規格値 Catalogue Value	355	355	45
純長 Length	29.5m	0.5m	0.5m	実測値 Actual Value	359	354	46
MADE BY NBC TECHNOLOGY				製造番号 Roll No.			
				純長 Length			
株式会社NBCメッシュテック / NBC Meshtec Inc. 東京都日野市豊田2-50-3 / 2-50-3 Toyoda, Hino, Tokyo 191-0053, Japan TEL (042) 582-2411 FAX (042) 584-1374 http://www.nbc-jp.com				純長 Extra			

NBC additional process for extra function

Anti-Static Resin Coated Polyester Monofilament Mesh

AS SCREEN™


AS SCREEN is special resin coated high modulus polyester mesh which has permanent anti-static properties effective throughout the printing process. It minimizes static charge electricity and prevents pin-holes and ink splashing. Emulsion and capillary films adhere well to this mesh. AS SCREEN is available on request in mesh counts from 120 to 508 threads/inch (47 to 200 threads/cm).

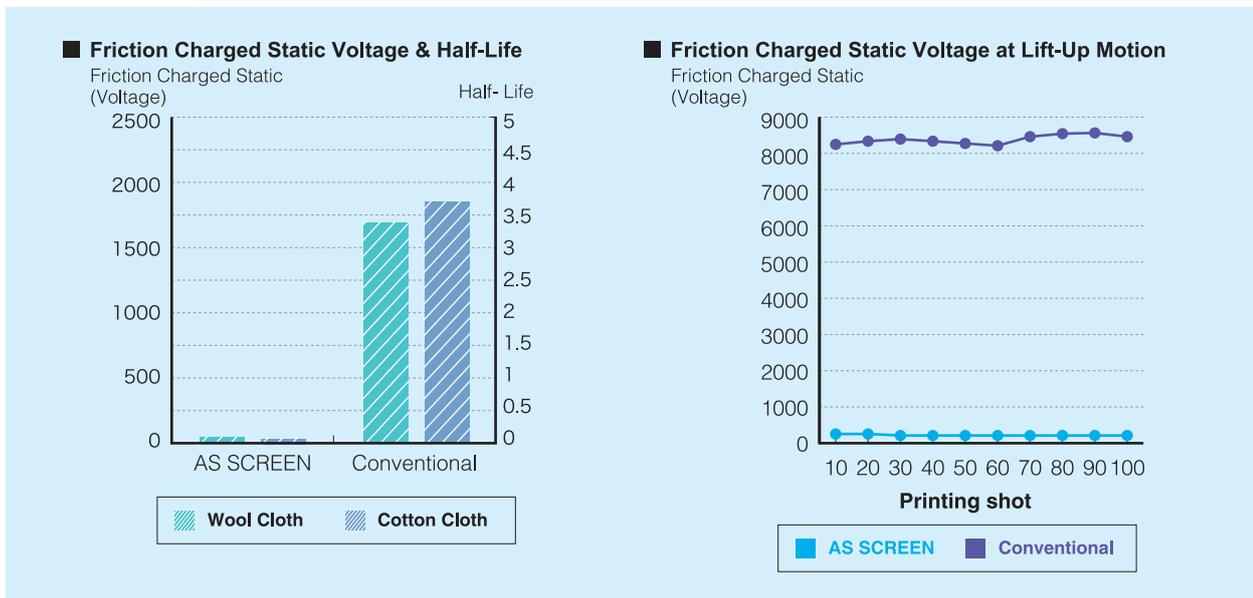

One-Side Calendered Polyester Monofilament Mesh

CATEX™

CATEX mesh reduces your ink consumption by 20-30%. Especially designed for high production clear coating where a minimum ink deposit is a priority. CATEX can also be helpful when printing back-lighted panels where uniform ink deposit is extremely critical. CATEX mesh is available up to 240cm wide.

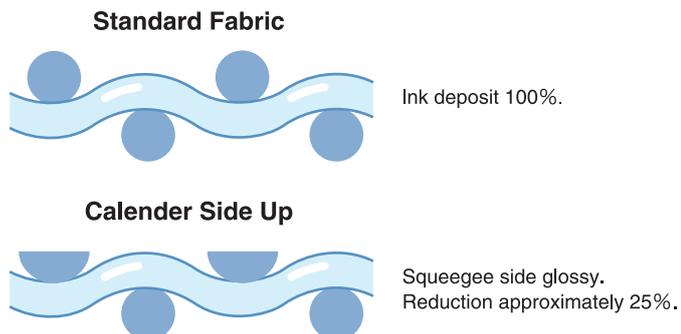



High Modulus Polyester Monofilament Mesh for General Screen Printing Applications

β series is classic high modulus polyester monofilament mesh which is produced under NBC's high quality standards. The dimensional accuracy and tension stability are kept at a high level.



Mesh Code	Mesh Count		Weaving	Thread Diameter	Mesh Thickness		Mesh Opening	Open Area	Theoretical Ink Volume	
	Tolerance ±3%				115-155cm	165cm & wider			115-155cm	165cm & wider
	/cm	/inch			μm	μm			μm	μm
β_EX 120 -035/ 305 PW	120	305	1:1 PW	35	51 ±2μm	52 ±3μm	45	29	14.9	15.2
β_EX 120 -040/ 305 PW	118	300	1:1 PW	40	62 ±2μm	63 ±3μm	37	19	11.8	12.0
β_EX 110 -035/ 280 PW	110	280	1:1 PW	35	51 ±2μm	52 ±3μm	53	34	17.4	17.8
β_EX* 106 -040/ 270 PW	106	270	1:1 PW	40	60 ±2μm	61 ±3μm	49	27	16.3	16.6
β_EX 100 -040/ 255 PW	100	255	1:1 PW	40	60 ±2μm	61 ±3μm	56	32	19.0	19.3
β_EX* 100 -048/ 255 PW	100	255	1:1 PW	48	76 ±2μm	76 ±3μm	45	20	15.5	15.5
β_EX* 90 -040/ 230 PW	90	230	1:1 PW	40	60 ±2μm	61 ±3μm	67	37	22.1	22.5
β_EX* 90 -045/ 230 PW	90	230	1:1 PW	45	68 ±2μm	69 ±3μm	60	30	20.1	20.4
β_EX 90 -048/ 230 PW	88	225	1:1 PW	48	75 ±3μm	76 ±3μm	58	26	19.8	20.1
β_EX 79 -045/ 200 PW	79	200	1:1 PW	45	68 ±3μm	69 ±3μm	81	41	27.7	28.1
β_EX 79 -048/ 200 PW	79	200	1:1 PW	48	76 ±3μm	80 ±4μm	75	35	26.5	27.9
β_EX 71 -045/ 180 PW	71	180	1:1 PW	45	70 ±2μm	72 ±3μm	95	45	31.7	32.6
β_EX 71 -048/ 180 PW	71	180	1:1 PW	48	76 ±3μm	80 ±4μm	91	42	31.6	33.3
β_EX 63 -048/ 160 PW	63	160	1:1 PW	48	80 ±4μm	80 ±4μm	110	48	38.4	38.4
β_EX* 59 -045/ 150 PW	59	150	1:1 PW	45	72 ±2μm	74 ±4μm	124	54	38.6	39.7
β_EX 59 -048/ 150 PW	59	150	1:1 PW	48	77 ±3μm	79 ±4μm	120	50	38.7	39.7
β_EX* 53 -045/ 135 PW	53	135	1:1 PW	45	73 ±4μm	74 ±4μm	143	58	42.2	42.7
β_EX 53 -048/ 135 PW	53	135	1:1 PW	48	79 ±4μm	79 ±4μm	139	55	43.1	43.1
β_EX* 47 -045/ 120 PW	47	120	1:1 PW	45	73 ±4μm	74 ±4μm	167	62	45.4	46.1
β_EX 47 -048/ 120 PW	47	120	1:1 PW	48	80 ±4μm	80 ±4μm	163	59	47.4	47.4

The above specifications may be changed for quality improvement without notice.

*Non-Standard item, available upon request

Please ask your sales rep or supplier for availability and more information.

Nylon Monofilament Mesh for Specific Screen Printing Applications

NL SCREEN, nylon monofilament mesh is well-suited for printing onto curved or rigid surfaces such as containers, ceramic and so forth because of its flexibility and elasticity. NL SCREEN also has reliable mechanical resistance and good emulsion adhesion, making it suitable for printing with abrasive pastes or substrates.

Mesh Code	Mesh Count		Weaving	Thread Diameter	Mesh Thickness		Mesh Opening	Open Area	Theoretical Ink Volume	
	Tolerance ±3%				115-155cm	165cm & wider			115-155cm	165cm & wider
	/cm	/inch								
NL 200 -030/ 508 TW	200	508	2:2 TW	30	60±3µm	N/A	20	16	9.6	N/A
NL 180 -030/ 460 TW	180	460	2:2 TW	30	60±3µm	N/A	25	21	12.4	N/A
NL 165 -030/ 420 PW	165	420	1:1 PW	30	51±3µm	51±3µm	30	25	12.8	12.8
NL 165 -035/ 420 TW	165	420	2:2 TW	35	70±4µm	70±4µm	25	17	12.2	12.2
NL 150 -030/ 380 PW	150	380	1:1 PW	30	55±3µm	55±3µm	37	30	16.8	16.8
NL 150 -035/ 380 TW	150	380	2:2 TW	35	68±3µm	68±3µm	32	23	15.5	15.5
NL 140 -030/ 355 PW	140	355	1:1 PW	30	52±3µm	52±3µm	42	34	17.7	17.7
NL 140 -035/ 355 TW	140	355	2:1 TW	35	66±3µm	66±3µm	37	26	17.4	17.4
NL 130 -030/ 330 PW	130	330	1:1 PW	30	50±3µm	50±3µm	47	37	18.6	18.6
NL 130 -035/ 330 TW	130	330	2:1 TW	35	66±3µm	66±3µm	42	30	19.6	19.6
NL 120 -030/ 305 PW	120	305	1:1 PW	30	53±3µm	53±3µm	53	41	21.6	21.6
NL 120 -035/ 305 PW	120	305	1:1 PW	35	60±3µm	60±3µm	48	33	20.1	20.1
NL 120 -043/ 305 TW	120	305	2:1 TW	43	82±4µm	82±4µm	40	23	19.0	19.0
NL* 110 -038/ 280 PW	110	280	1:1 PW	38	64±3µm	64±3µm	53	34	21.7	21.7
NL 106 -035/ 270 PW	106	270	1:1 PW	35	60±3µm	60±3µm	59	39	23.6	23.6
NL 100 -043/ 255 PW	100	255	1:1 PW	43	75±4µm	75±4µm	57	32	24.4	24.4
NL 90 -043/ 230 PW	90	230	1:1 PW	43	75±4µm	75±4µm	67	37	27.8	27.8
NL* 81 -061/ 206 TW	81	206	2:1 TW	61	116±6µm	116±6µm	62	25	29.5	29.5
NL 79 -050/ 200 PW	79	200	1:1 PW	50	86±4µm	86±4µm	77	37	31.6	31.6
NL* 77 -061/ 196 PW	77	196	1:1 PW	61	111±6µm	111±6µm	69	28	31.3	31.3
NL* 73 -061/ 185 PW	73	185	1:1 PW	61	114±6µm	114±6µm	76	31	35.1	35.1
NL 69 -050/ 175 PW	69	175	1:1 PW	50	87±4µm	87±4µm	95	43	37.3	37.3
NL* 68 -070/ 173 TW	68	173	2:1 TW	70	133±7µm	133±7µm	77	27	36.5	36.5
NL* 62 -070/ 157 PW	62	157	1:1 PW	70	118±6µm	118±6µm	92	32	38.1	38.1
NL* 62 -080/ 157 PW	62	157	1:1 PW	80	146±7µm	N/A	82	26	37.4	N/A
NL 59 -061/ 150 PW	59	150	1:1 PW	61	106±6µm	106±6µm	108	41	43.3	43.3
NL* 55 -070/ 140 PW	55	140	1:1 PW	70	126±6µm	126±6µm	111	38	47.4	47.4
NL* 55 -080/ 140 PW	55	140	1:1 PW	80	140±7µm	140±7µm	101	31	43.6	43.6
NL 49 -070/ 125 PW	49	125	1:1 PW	70	121±6µm	121±6µm	133	43	51.9	51.9
NL* 49 -080/ 125 PW	49	125	1:1 PW	80	142±7µm	145±7µm	123	37	52.1	53.2
NL 43 -070/ 110 PW	43	110	1:1 PW	70	121±6µm	121±6µm	161	49	58.8	58.8
NL* 43 -080/ 110 PW	43	110	1:1 PW	80	140±7µm	140±7µm	151	43	59.8	59.8

The above specifications may be changed for quality improvement without notice.

*Non-Standard item, available upon request

Please ask your sales rep or supplier for availability and more information.

VALUE MODEL Series Precision semiautomatic stretching equipment

The VALUE MODEL is a semiautomatic stretching device designed and manufactured by NBC for precision screen.

The VALUE MODEL stretching device was developed by NBC in response to customer demands for higher stretching tension. NBC was determined to not just slightly improve tired concepts, but to create a real breakthrough in stretching technology to reinvent stretching. As a result the VALUE MODEL uses many sophisticated controls not found on conventional equipment.



VALUE MODEL
SEMI-AUTOMATIC
STRETCHING EQUIPMENT

VALUE-MODEL Specifications

	VALUE 1150	VALUE1360	VALUE1550
Body dimension (L×W×H)	1600×1600×1000(mm)	1840×1840×1000(mm)	2000×2000×1000(mm)
Body weight (kg)	Approx. 500	Approx. 630	Approx. 780
Stretching effective area	900×900(mm)	1080×1080(mm)	1250×1250(mm)
Power supply	85 - 264V AC, 100W or less	85 - 264V AC, 100W or less	85 - 264V AC, 100W or less
Air source	Dry air 0.7 MPa or more, Approx. 50 NL/cycle	Dry air 0.7 MPa or more, Approx. 70 NL/cycle	Dry air 0.7 MPa or more, Approx. 90 NL/cycle

NBC proposes “new stretching technique”

Simply place a screen on the table and start stretching



Place screen on table



Press foot switch to activate corner stretching




Press start on Liquid crystal touch panel



Automatic clamps grip mesh




Fabric stretched to preset tension

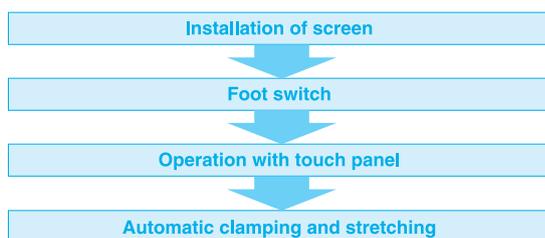


Pivoting clamp option provides additional clearance for wire mesh, helping avoid wrinkles.

The most striking feature of the VALUE MODEL is its ease of operation. After placing the screen on the table all that is required is setting the corner clamps with the foot switch and selecting start on the liquid crystal display. The VALUE MODEL automatically clamps the fabric and stretches it to the set tension.

Screen-mesh distortion prevented with the diagonal tensioning system





Distortion created by conventional stretching equipment



Distortion free corner stretched by VALUE-MODEL

The real ground breaking feature of the VALUE MODEL is its diagonal stretching. Adding tension in the corners is counter to the traditional wisdom of stretching, because most stretching equipment adds slack in the corners to prevent tearing the mesh during stretching. The chart on the left clearly shows the distortion created in the corners by conventional stretching equipment. The chart on the right shows the uniform tensioning results in the corners achieved every time with the VALUE MODEL.

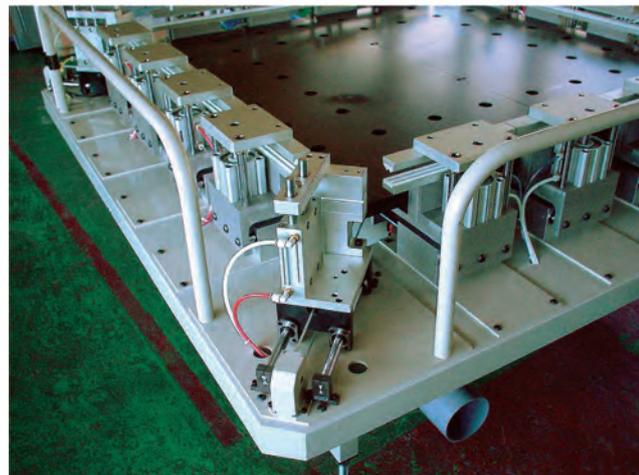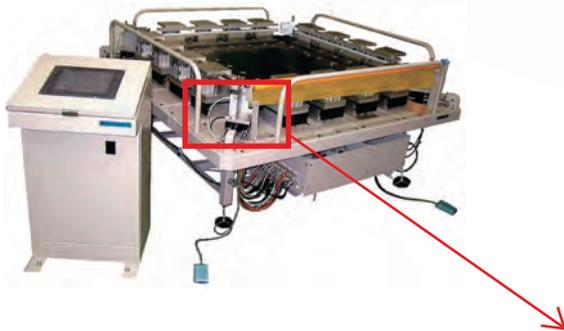


Magnified view of corner (Diagonal tension system)

Easy to operate control panel

The easy to operate control panel allows anyone to accurately stretch screens to high tension. The programmable processor can memorize up to 1million stretching programs. Each stretching program can be customized to satisfy any customer needs using 18 parameters including diagonal stretching, overall tension and aging time. When it's time to stretch just set the screen tension desired, and with one touch of the button screens are brought right up to the correct tension.



Touch panel



Operation screen




Specifications screen



Data entry screen

Products Portfolio & Suitable Applications

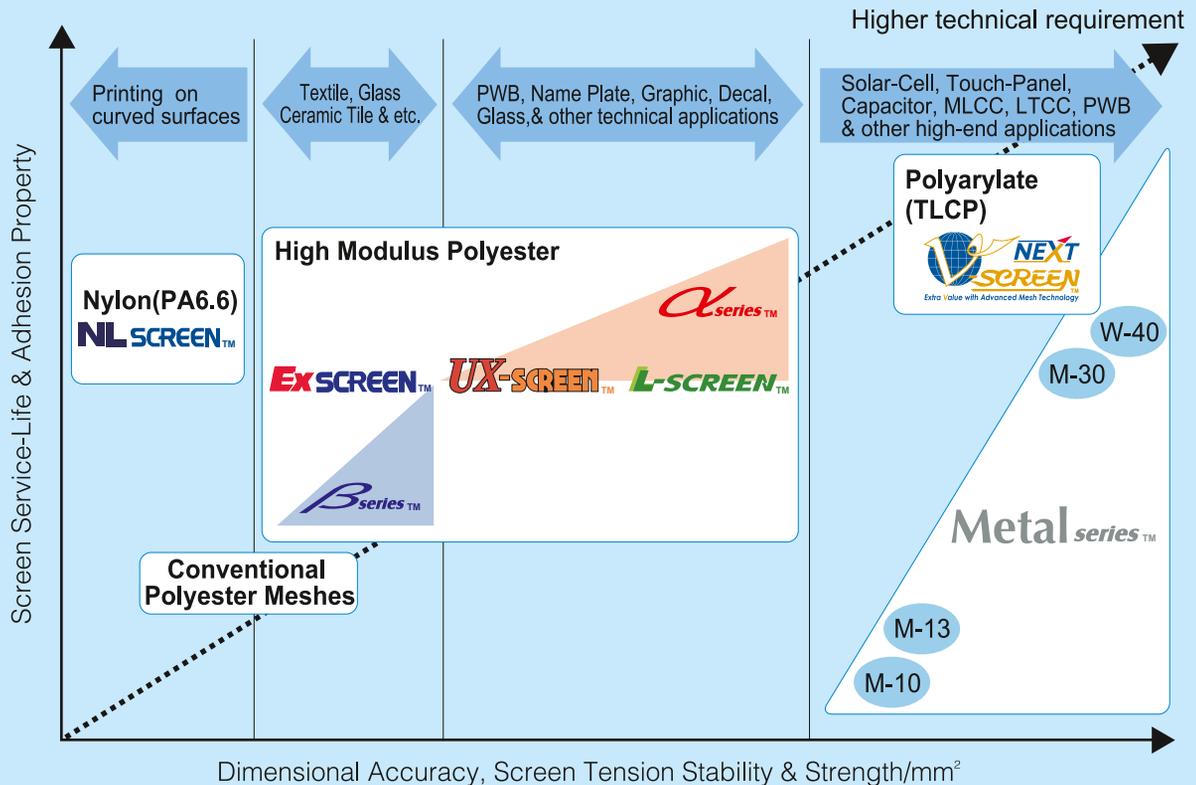

NBC Meshtec inc. (Japan)

Head-office

2-50-3 Toyoda, Hino,
Tokyo 191-0053, Japan

TEL 81-42-582-2413

FAX 81-42-584-1374

E-mail: overseas_nbc@nisshin.com

<https://www.nbc-jp.com/eng/>

PVF MESH & SCREEN TECHNOLOGY

ADDRESS

PVF Mesh & Screen
Technology GmbH
Adalbert-Stifter-Weg 30
85570 Markt Schwaben

CONTACT

T +49 8121 4784-0
E info@pvfgmbh.de
I www.pvfgmbh.de
FOLLOW in f y

NBC MESHTEC AMERICAS INC. (USA)

512 KINGSLAND DR
BATAVIA, IL 60510, U.S.A.

TEL 1-630-293-5454

FAX 1-630-293-5647

<https://nbcmeshtec.com/>

NBC(SHANGHAI) MESH CO.,LTD (China)

Room 203, 1178-2Floors, Beidi road,
shanghai 200335 China

TEL 86-21-5216-1177

FAX 86-21-5216-1277



Registered Number JQA-0748
Standard ISO 9001
Registered Factory NBC Meshtec inc.



Registered Number JQA-EM2546
Standard ISO 14001
Registered Factory NBC Meshtec inc.